


Data sheet Product LB SLY 06 ...

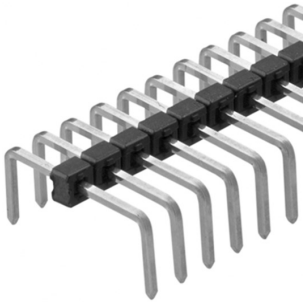


Sockets>Jumper links / Separable jumpers
 grid 2.00 mm, □ 0.5 mm

Features

no. of contacts:	1 - 50
contact material:	CuSn alloy
surface contact / contact sleeve:	<ul style="list-style-type: none"> • Ni+≥0.2µm Au • Ni+4...6µm Sn
volume resistance:	5 mΩ
connection type:	THT (soldering)
nominal current:	3 A
nominal voltage:	100 V DC
test voltage:	500 V
insulating body material:	PA 4.6. GF
temperature range:	<ul style="list-style-type: none"> • -40°C... +163°C • (260°C/10 s)
class of inflammability:	UL 94 V-0
specific insulation resistance:	>10 ⁷ Ω·m
surface of contact:	<ul style="list-style-type: none"> • gold-plated • tin-plated
grid:	2 mm

Technical Drawing

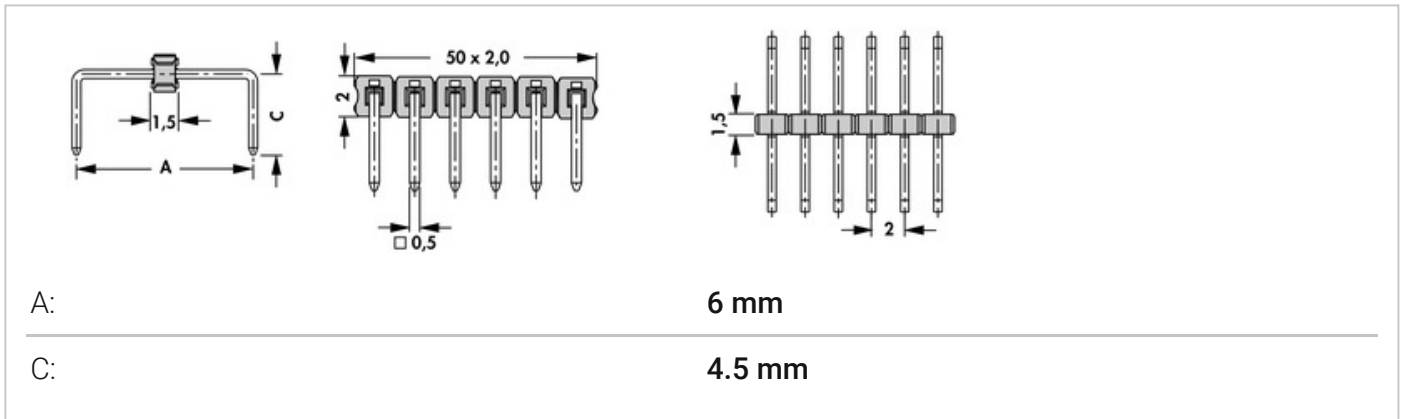

Fischer Elektronik GmbH & Co. KG
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28
58511 Lüdenscheid

Telefon +49 2351 435-0
Telefax +49 2351 45754

info@fischerelektronik.de
www.fischerelektronik.de