


Data sheet Product LB SL LP 039 SMD ...




Sockets>Jumper links / Separable jumpers
 grid 2.54 mm; jumper link for LED- and standard-PCBs

Features

no. of contacts:	2 - 20
contact material:	CuSn alloy
surface contact / contact sleeve:	<ul style="list-style-type: none"> • Ni+≥0.2µm Au • Ni+4...6µm Sn
volume resistance:	5 mΩ
connection type:	SMD
nominal current:	3 A
nominal voltage:	250 V DC
test voltage:	2000 V
insulating body material:	PA 4.6. GF
temperature range:	<ul style="list-style-type: none"> • -40°C... +163°C • (260°C/10 s)
class of inflammability:	UL 94 V-0
specific insulation resistance:	>10 ⁷ Ω·m
surface of contact:	<ul style="list-style-type: none"> • gold-plated • tin-plated
grid:	2.54 mm

Technical Drawing



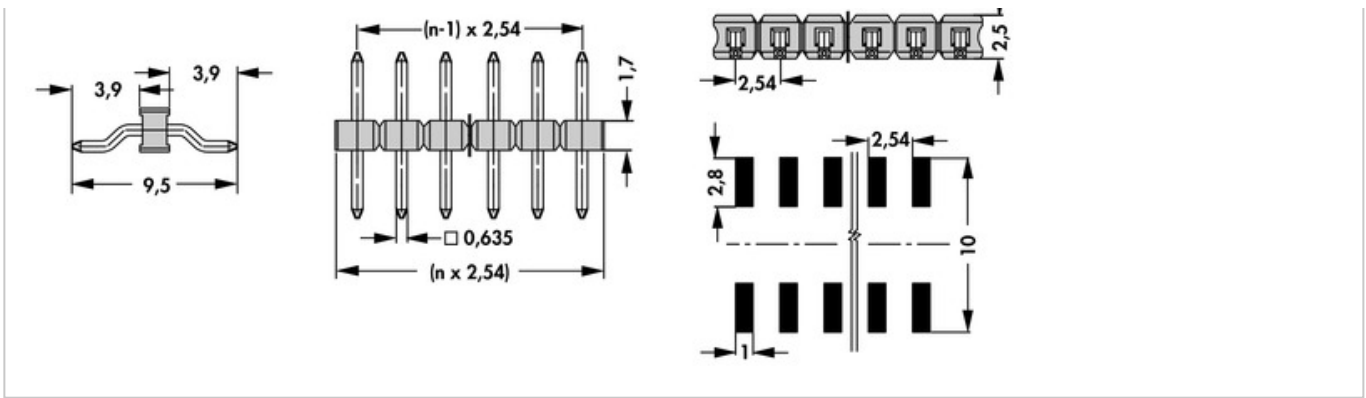

Fischer Elektronik GmbH & Co. KG
 DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28
 58511 Lüdenscheid

Telefon +49 2351 435-0
 Telefax +49 2351 45754

info@fischerelektronik.de
 www.fischerelektronik.de