
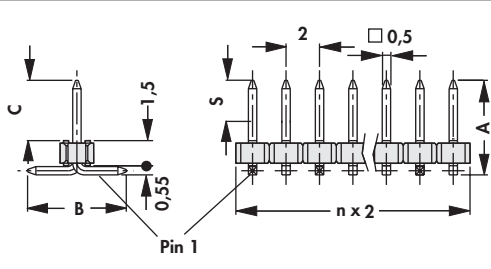
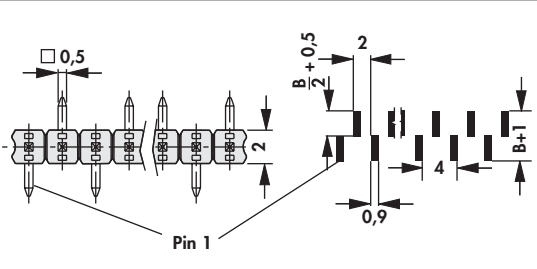


Male headers

□ 0.5 mm

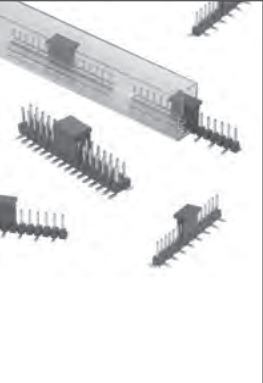
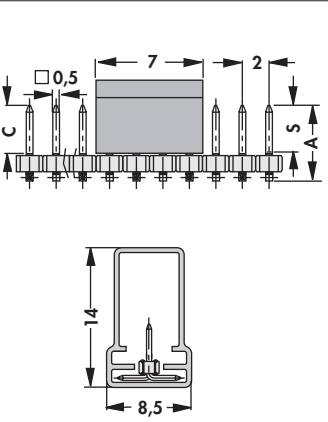
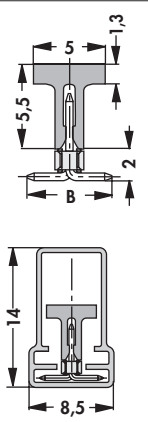
art. no.	dim. [mm]			
	A	B	C	S
<b>SLY 7 SMD 036 ...</b>	5.6	6.3	3.6	3.0
<b>SLY 7 SMD 045 ...</b>	6.5	4.6	4.5	3.5
<b>SLY 7 SMD 062 ...</b>	8.2		6.2	

please indicate: ... no. of contacts one row 4 - 20      ... surface of contact S = selective gold-plated G = gold-plated Z = tin-plated      ... packing (optional) SM = bar magazine B SM = pick and place pad and bar magazine B TR = pick and place pad and tape and reel (650pcs/reel)

... packing (option) - additions:  
**SLY 7 SMD 036-045 ... B TR: 4-15 contacts**

Option for automatic assembly


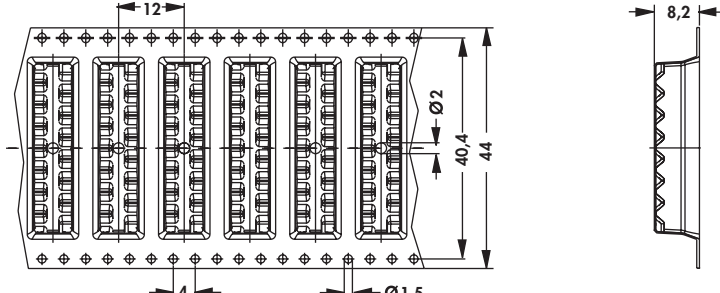
- reel diameter Ø 330 mm

**... SM**

**... B SM**

**SLY 7 SMD ... SM**      **SLY 7 SMD ... B SM**

**... B TR**

**SLY 7 SMD 036-045 ... B TR**