


Male headers


□ 0.5 mm

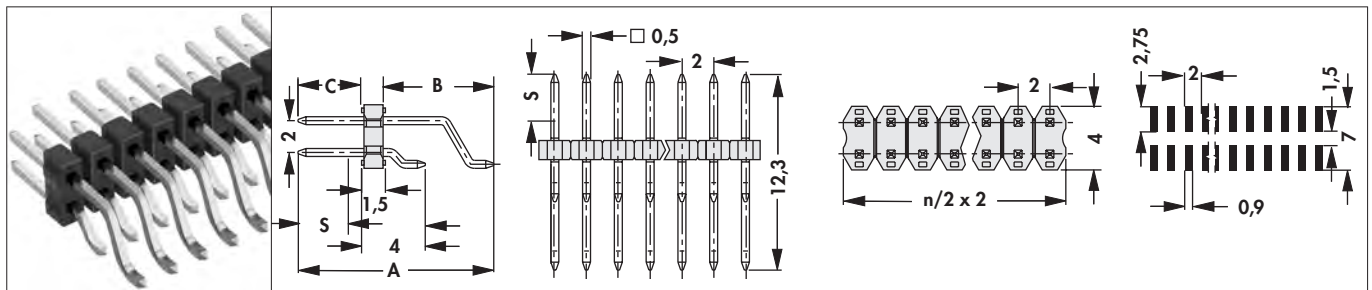


art. no.	dim. [mm]			
	A	B	C	S
SLY 10 SMD 040 ...	12.3	6.8	4	3.5
please indicate:	... no. of contacts two rows 4 - 40	... surface of contact S = selective gold-plated G = gold-plated Z = tin-plated	... packing (optional) B SM = pick and place pad and bar magazine B TR = pick and place pad and tape and reel (700pcs/reel)	

Option for automatic assembly

– reel diameter Ø 330 mm

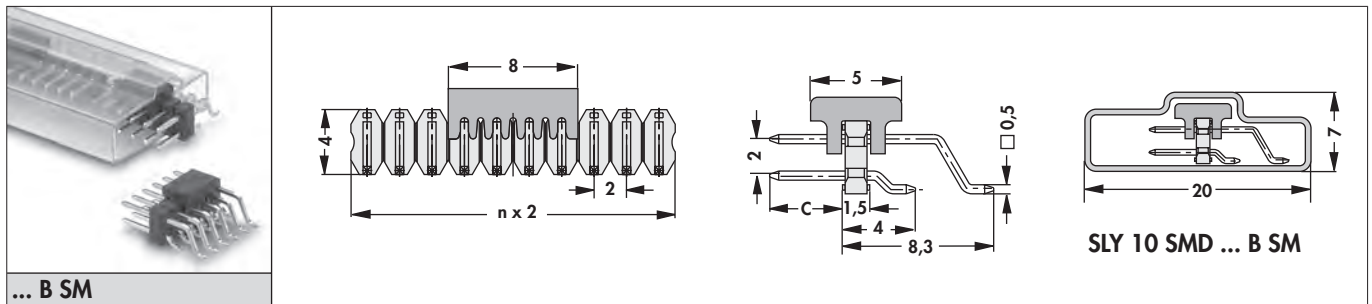

... B SM

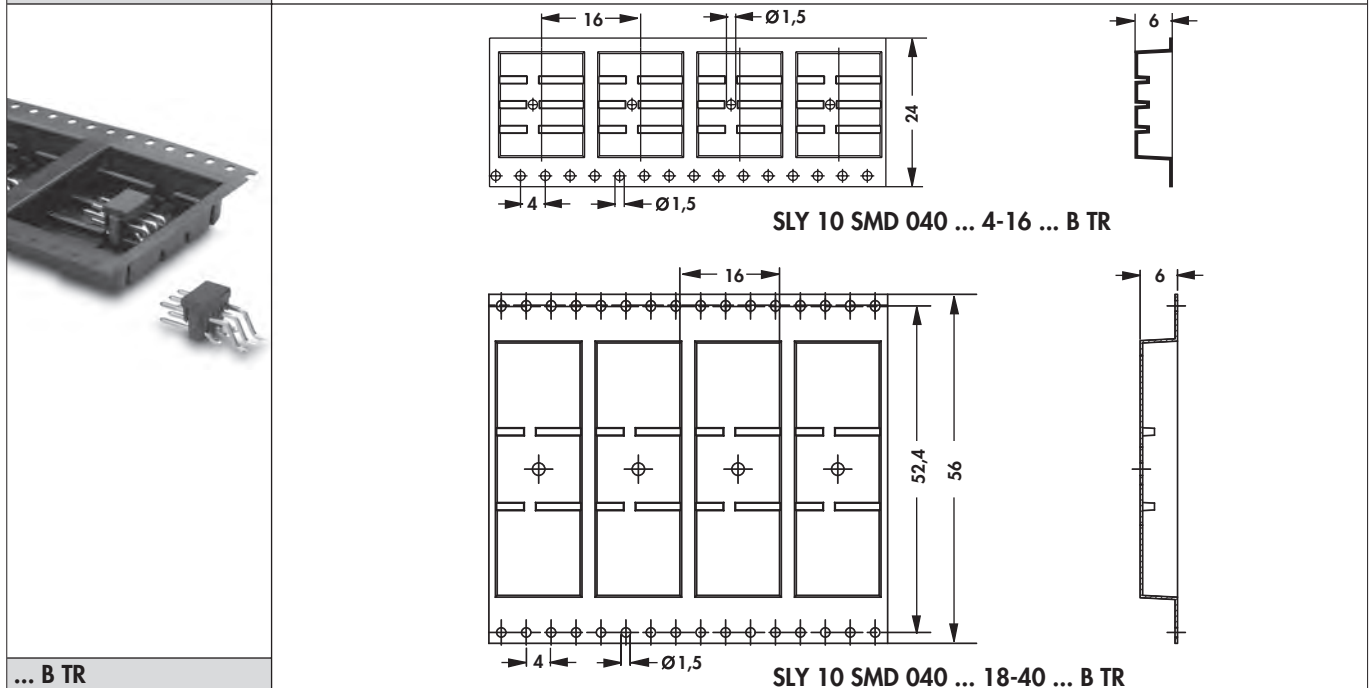

... B TR